


# Matrox X.mio3 LP

## Multi-channel SDI low profile card with hardware-based processing

Matrox X.mio3 LP features re-configurable multi-channel SD, HD, 3G and 4K SDI I/O with advanced hardware-based processing in a low profile card. This card is supported by the Matrox DSX SDK (Software Development Toolkit). Please refer to the Matrox DSX Developer Products datasheet for information on file I/O, software codecs and CPU effects.

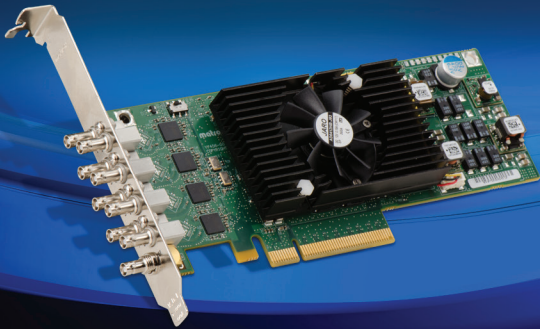

### Key features

- Low profile, half-length PCI-e card
- Re-configurable I/O that can support up to 8 SDI inputs or outputs
- Frame synchronizers
- VANC and HANC support for each input and output
- Analog blackburst reference input (tri-level or bi-level)
- On-board multi-channel MADi (Motion Adaptive De-Interlacer)
- On-board multi-channel Up/Down/Cross scaler
- On-board multilayer compositor
- Automatic video relay bypass (optional)
- Live zero-frame delay video and audio mixer

### System bus interface

- Single-slot PCIe Gen2 x8 bus
- Allows for multiple cards in a system

### Digital video inputs and outputs

- Reconfigurable inputs and outputs
- Serial digital component 4:2:2 video at 270 Mbps in accordance with SMPTE 259M (SD)
  - 480i (NTSC) at 29.97 fps
  - 576i (PAL) at 25 fps
- Serial digital component 4:2:2 video at 1.5 Gbps in accordance with SMPTE 292M (HD)
  - 1080i at 25, 29.97, and 30 fps
  - 720p at 50, 59.94, and 60 fps
  - 1080p/PsF at 23.98, 24, 25, 29.97, and 30 fps
- 3G SDI in accordance with SMPTE 424M and SMPTE 425M-AB
  - 1080p at 50, 59.94, and 60 fps
  - 8 and 10-bit YUV 4:2:2
- Up to 8 10-bit 4:2:2 serial digital video inputs
- Up to 8 10-bit 4:2:2 serial digital video outputs
- Up to 4 SDI inputs and outputs can be a key or video, where key inputs and outputs can be expanded and inverted
- 4K and QFHD (Quad Full HD) input and output
  - 3840x2160p at 59.94, 50, 30, 29.97, 25, 24, 23.98
- Simultaneous input and output of different video standards
- Auto-detection of input video standard
- Video relay bypass for 4 inputs (optional)
- Independent horizontal and vertical timing presets for each video output
- Generic support of VANC
- Support for HANC packets (SMPTE 12M-2 and SMPTE 352)
- Proc amp controls at inputs

### Built-in frame synchronizers

- Up to 8 frame synchronizers
- Corrects timebase of inputs to the genlock source
- 16 channels of audio resampling per input
- 1-frame latency
- Can be optionally disabled

### Motion Adaptive Deinterlacer

- Pixel based operation
- Temporal and spatial-based motion estimation
- Anti-Aliasing filtering
- Telecine detection and film restoration
- Video over film detection
- Up to 4 channels of 1080i30 to 4 channels of 1080p60 processing
- 10-bit processing

### Onboard scaler

- Pixel-based scaling, positioning, and cropping
- Scaling of up to 8 channels of 1080i30
- Down, up and cross scaling
- Supports custom resolutions and broadcast resolutions up to 4K
- 8- and 10-bit surfaces
- YUV 4:2:2 and YUVA 4:2:2:4 surface formats
- Aspect ratio and colorimetry conversion between SD and HD
- Ancillary data conversion between SD and HD

### Onboard compositor

- Programmable in single or multiple compositor configurations
- 8- and 10-bit video
- Up to 8 layers of 1080i30 compositing or 2 layers of 4K p60 compositing
- Full-blend and half-blend mixing
- Shaped or unshaped video compositing
- RGBA to YUVA color space conversion
- Logo input support with pixel-based positioning

### In-line live video and audio mixer

- Up to 4 live mixers
- Zero frame delay
- 8- and 10-bit video
- Downstream mixing of live video with host buffers
- Mixing of 16 tracks of live embedded audio with host audio


### Embedded audio inputs and outputs

- Supports up to 16 channels of embedded audio per SDI video stream in accordance with SMPTE 272M A, B, and C (SD) and SMPTE 299M (HD)
- 48 kHz sampling
- Supports 16-, 20-, and 24-bit audio streams

### Genlock time base

- Analog blackburst reference (tri-level or bi-level) or SDI input as reference
- Optional latching termination
- Auto detection of genlock standard

## Matrox X.mio3 LP (4 inputs and 4 outputs configuration)

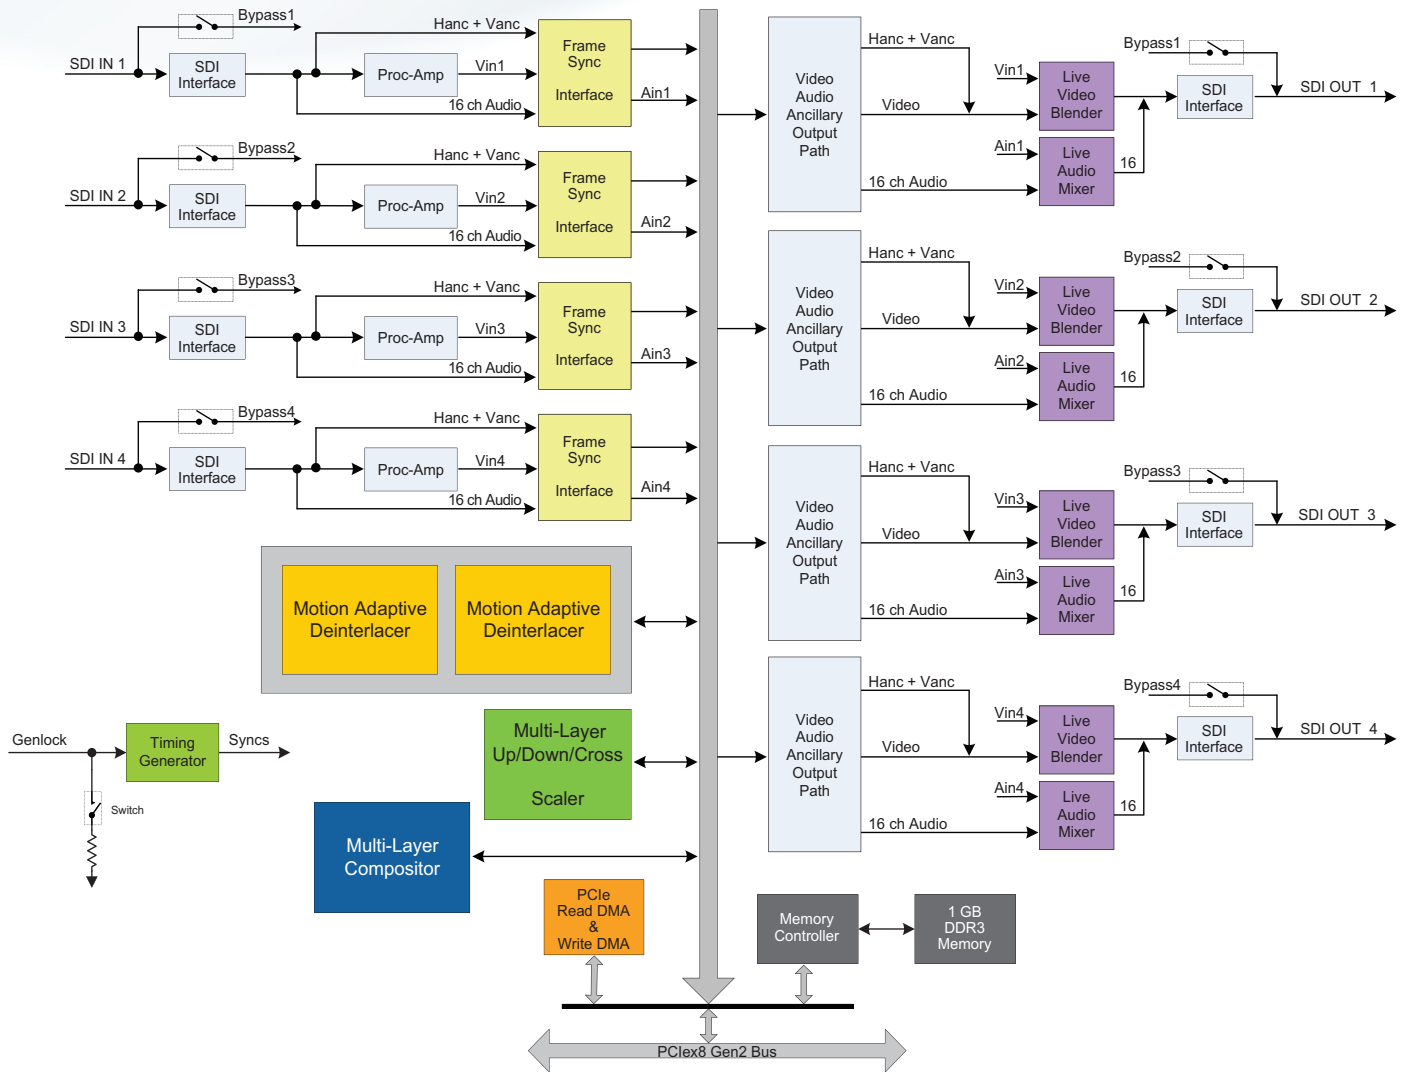

[www.matrox.com/video](http://www.matrox.com/video)

Corporate Headquarters — Matrox Video Products Group  
 Tel: (514) 822-6364, (800) 361-4903 (North America) • Fax: (514) 685-2853  
 E-mail: [video.info@matrox.com](mailto:video.info@matrox.com)

**matrox**<sup>®</sup>  
 Digital Video Solutions

Any particular application may or may not take advantage of all the Matrox DSX features described in this brochure. Matrox Electronic Systems Ltd. reserves the right to make changes in specifications at any time and without notice. The information provided by this document is believed to be accurate and reliable. However, no responsibility is assumed by Matrox Electronic Systems Ltd. for its use, nor for any infringements of patents or other rights of third parties resulting from its use. No license is granted under any patents or patent rights of Matrox Electronic Systems Ltd. Matrox makes no warranties, express or implied, with respect to the performance of third party products described herein. Matrox and Matrox DSX are registered trademarks and Matrox X.AV/CiO, Matrox X.open, Matrox X.io, Matrox X.linkSD, Matrox X.linkHD, Matrox X.effects, Matrox X.scaler, Matrox X.mio, Matrox X.mio2, Matrox X.DVI and Matrox X.FIO are trademarks of Matrox Electronic Systems Ltd. Inc. Other product names mentioned in this document may be registered trademarks or trademarks of other companies. Printed in Canada, July 2014